

Motion detector - Professional Line

sensIQ S KNX

inox

EAN 4007841 004040



infrared sensor 3 x
100°



3 zones scalable
2-20m



KNX



IP54



2 - 2000 lux
daylight operation



ideal 2 - 5 m

TEACH

Teach mode



energy saving



5 JAHRE
HERSTELLER
GARANTIE
steinel-professional.de/garantie



CE

Function description

The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3x100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Remote control and corner wall mount bracket included.

sensIQ S KNX

inox

EAN 4007841 004040

Technical specifications

| | |
|---|---|
| Type | Motion detectors |
| Type of accessory | Corner adapter |
| Dimensions (L x W x H) | 128 x 114 x 74 mm |
| Power supply, detail | KNX bus |
| Sensor Technology | passive infrared |
| Application, place | Indoors |
| Application, place, room | multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors |
| Installation site | wall, corner |
| Installation | Surface wiring |
| Switching zones | 304 switching zones |
| Electronic scalability | No |
| Mechanical scalability | Yes |
| Mounting height | 2,00 – 5,00 m |
| Optimum mounting height | 2 m |
| Detection angle | 300 ° |
| Angle of aperture | 90 ° |
| Sneak-by guard | Yes |
| Capability of masking out individual segments | Yes |
| Reach, detail | Reach adjustable from 2 - 20 m in 3 directions (100° in each) |
| Reach, radial | r = 4 m (42 m ²) |

| | |
|---------------------------------|---|
| Reach, tangential | r = 20 m (1047 m ²) |
| Twilight setting TEACH | Yes |
| Twilight setting | 2 – 2000 lx |
| Time setting | 5 s – 15 Min. |
| Constant-lighting control | Yes |
| Basic light level function | Yes |
| Basic light level function time | 1-255 min |
| KNX functions | Light output 2x, Presence output, Light level, Basic light level function, Photo-cell controller, Close range |
| With bus coupling | Yes |
| Settings via | ETS software, Remote control, Bus, Smart Remote |
| With remote control | Yes |
| Interconnection | Yes |
| IP-rating | IP54 |
| Material | Plastic |
| Ambient temperature | -20 – 50 °C |
| Colour | Stainless steel |
| IDs, certificates | VDE |
| Manufacturer's Warranty | 5 years |
| Version | inox |
| PU1, EAN | 4007841004040 |

Accessories


| | |
|--------------------|----------------------------|
| EAN 4007841 608835 | Corner wall mount sensIQ S |
| EAN 4007841 608804 | Corner wall mount sensIQ S |
| EAN 4007841 608828 | Corner wall mount sensIQ S |
| EAN 4007841 601416 | Remote control RC1 |

sensIQ S KNX

inox

EAN 4007841 004040

Detection Zone

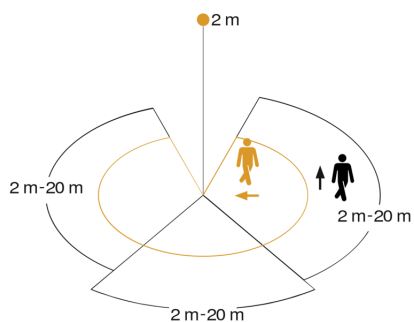

Mögliche Montagehöhe: 2,00 m – 5,00 m

Orange: radial

Schwarz: tangential

3 skallerbare Zonen

Dimension Drawing

